



Fig. 2-11a Nose Wheel Sectional View

A) Wheel K23-0000-7

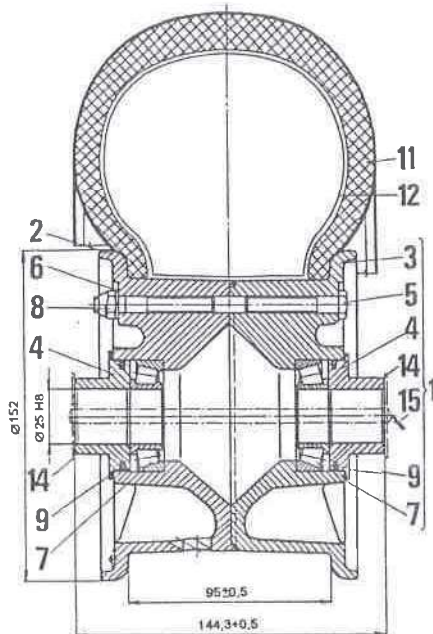

B) Wheel K51-1100-7

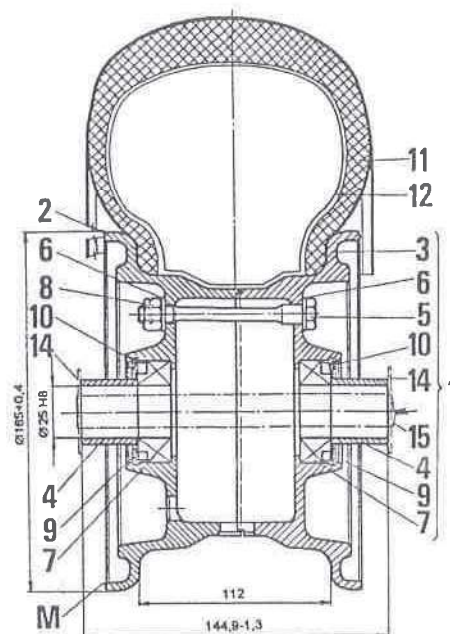

- 1 - Wheel K23-0000-7 (Item. 2 through 9)
- 2 - Wheel left part
- 3 - Wheel right part
- 4 - Lid
- 5 - Bolt (3 pcs)
- 6 - Washer
- 7 - Bearing
- 8 - Nut
- 9 - Felt ring
- 11 - tire
- 12 - tube
- 14 - Distance cap (2 pcs) } for wheel
- 15 - Locking wire } transport

- 1 - Wheel K51-1100-7 (Item. 2 through 10)
- 2 - Wheel left part
- 3 - Wheel right part
- 4 - Distance piece
- 5 - Bolt (3 pcs)
- 6 - Washer
- 7 - Bearing
- 8 - Nut
- 9 - Retaining ring
- 10 - NILOS packing
- 11 - tire
- 12 - tube
- 14 - Distance cap (2 pcs) } for wheel
- 15 - Locking wire } transport
- M - The heaviest place of the wheel (without tire) marked with red point

NOTE:

Wheel balancing is not done at wheels K23-0000-7 and the heaviest place is not marked on them.

Conversion from mm to in:

	mm	in
A)	25 H8	0.9842 ^{+0.013}
	95 ± 0.5	3.74 ± 0.02
	144.3±0.5	5.68 ± 0.02
	152	5.98

	mm	in
B)	25 H8	0.9842 ^{+0.013}
	112	4.41
	144.9-1.3	5.70-0.05
	165 +0.4	6.50+0.02

REVISION No.5
Mar 20, 2000